

Imagine the invisible

Industrial

# Bobcat-640-GigE

High resolution small form factor InGaAs camera




## Smallest SWIR GigE Vision camera with low noise and dark current

The ultra-compact Bobcat-640-GigE meets machine vision system designers who need high sensitivity in the SWIR range for specialized quality inspection and high temperature process control.

The industry-standard GigE Vision interface and small form factor reduce the cost and increase the ease of integration. Furthermore the pixel pitch of 20  $\mu\text{m}$  makes the Bobcat-640-GigE compatible with a broader range of C-mount lenses and other lower-cost lenses.

The Bobcat-640-GigE comes as a complete camera with on-board image processing and Thermo Electric stabilization for low dark current and optimized noise performance, all resulting in superior image quality. A vSWIR option extends the wavelength into the visible realm for best sensitivity in low-light applications.

The Bobcat-640-GigE reaches high frame rates up to 100 Hz in full resolution of 640 x 512 and can be further increased in windowing mode.

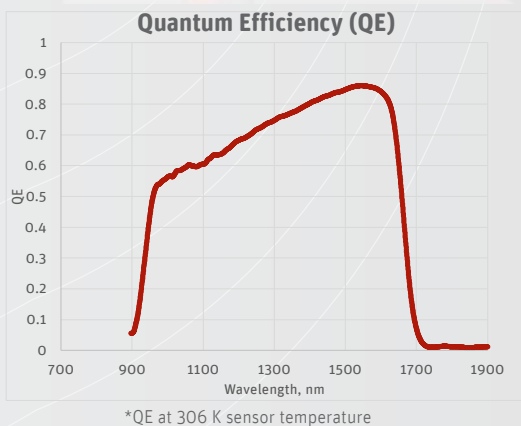

Designed for use in



Quality inspection of food: visible vs. SWIR



Thermal imaging of hot objects



Fluid level monitoring

### Applications

- Waste sorting
- Food inspection
- Failure analysis
- Semiconductor inspection
- Thermal imaging of hot objects (> 300 °C)

### Benefits & Features

- Made in Europe
- Frame rates up to 100 Hz
- On-board image processing
- High Operating Temperature Range
- Smallest complete SWIR GigE camera
- Standard GigE Vision for ease of integration
- Low noise and low dark current for excellent image quality

# Broad range of accessories available to simplify your inspection

## ▶ Lens & filter options

Various focal lengths available



▶ Discover our Lens Selector Guide  
[www.xenics.com/LSG](http://www.xenics.com/LSG)



## ▶ Inputs



## ▶ Outputs

## ▶ Software



- Xeneth advanced
- Xeneth SDK (optional)
- Xeneth LabVIEW SDK (optional)

## Specifications

Camera specifications	Bobcat-640-GigE
Lens	
Focal length	Broad selection of lenses available
Optical interface	C-mount
Imaging performance	
Frame rate	100 Hz
Window of interest	Minimum size 32 x 4
Integration type	Snapshot
Exposure time range	1 $\mu$ s - 40 ms in high gain mode*
Noise**	High gain: 120 e- Low gain: 400 e-
Gain	High gain: 1.28 e-/ADU Low gain: 16.2 e-/ADU
Readout mode	Integrate Then Read (ITR) Integrate While Read (IWR)
Onboard image processing	Up to 4 Non Uniformity Calibrations (NUC) for fixed exposure time can be uploaded, auto gain, trigger possibilities
A to D conversion resolution	14-bit
Operating mode	
Self-starting	Yes
Interfaces	
Camera control	GigE Vision
Image acquisition	GigE Vision or Xeneth API/SDK
Trigger	Trigger In or Out (configurable)
Power requirements	
Power consumption**	+/- 4 W (without TEC)
Power supply	12 V
Physical characteristics	
Shock	40 G, 11 ms halfsine profile, according to MIL-STD810G
Vibration	5 G, (20 Hz to 2000 Hz), according to MIL-STD883
Operating case temperature	-40 °C to 70 °C (industrial components)
Storage temperature	-45 °C to 85 °C (industrial components)
Dimensions	55 W x 55 H x 82 L mm (without lens)
Weight camera head	+/- 334 g (lens not included)

\* At sensor temperature 25 °C  
 \*\* Typical values

Array specifications	Bobcat-640-GigE
Sensor type	InGaAs Focal Plane Array (FPA) ROIC with CTIA*** topology
Spectral band	0.9 to 1.7 $\mu$ m Optional 0.4 to 1.7 $\mu$ m (vSWIR)
# pixels	640 x 512
Pixel pitch	20 $\mu$ m
Quantum efficiency	Peak value +/- 80 %
ROIC noise**	High gain: 60 e-; low gain: 400 e-
Dark current**	<1E5 (at 288K sensor temp and 150mV reverse bias) vSWIR: <2E5
Integration capacitor	High gain: 6.7 fF; low gain: 85 fF
Array cooling	TE1-stabilized
Pixel operability	> 99 %

\*\*\* Capacitor TransImpedance Amplifier

## Product selector guide

Part number	Interface	Frame rate	vSWIR
XEN-000139	GigE Vision	100 Hz	Yes
XEN-000298			No



Edificio Antalia, Albasanz 16. 28037 Madrid  
 915 679 700 | [grupoalava.com](http://grupoalava.com) | [alava@grupoalava.com](mailto:alava@grupoalava.com)  
 Madrid | Barcelona | Zaragoza | Lisboa | Lima | Texas