


ELECTRODYNAMIC EXCITER FAMILY

The electrodynamic exciter family includes small permanent magnet shakers rated from 110 lbf (489 N) down to 2 lbf (9 N). Available designs include the revolutionary SmartShaker™ with integrated power amplifier, a variety of mini, through-hole modal, dual purpose platform and accelerometer calibration shakers, and the SmartAmp™ power amplifiers. These transducers are ideal for applications ranging from experimental modal analysis and general vibration testing of small components and sub-assemblies to accelerometer calibration.

The following selection guide provides an overview of the basic shaker specifications. A simple graphical representation of shaker systems paired with appropriate power amplifiers indicates the corresponding system force ratings. Kit model numbers simplify the selection and ordering process, insuring that all the necessary shaker, amplifier, stingers, cooling blowers (if needed), and accessories are included.

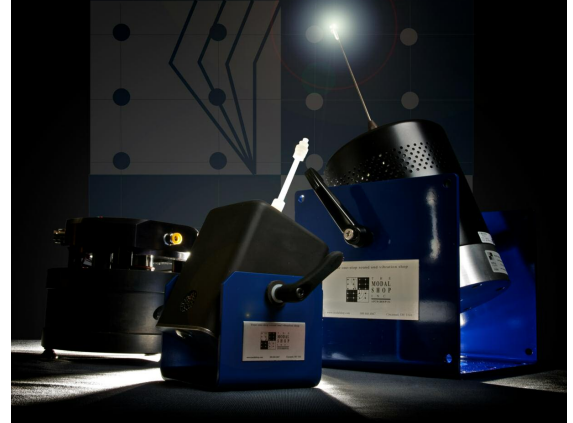

Application	Shaker Model	Amplifier Model	Force Rating lbf (N) pk shaker/amp pair	Stroke in (mm) pk-pk	Weight * lb (kg)	Max Freq ** (Hz)
Inertial shaker, general vibrate, structural excitation	2002E	2000E	2 (9)	N/A	0.56 (0.25)	3 000
		2100E21-100	2 (9)			
Modal analysis, general vibrate, small structures	2004E	2100E21-100	4.5 (20)	0.2 (5)	6 (3)	11 000
	K2004E01	Integrated			7 (3)	
Modal analysis, general vibrate, small structures	2007E	2100E21-100	7 (31)	0.5 (13)	6 (3)	9 000
	K2007E01	Integrated			7 (3)	
Modal analysis, small to medium structure	2025E	2100E21-400	13 (58)	0.75 (19)	13 (6)	9 000
Modal analysis, medium to large structure	2060E	2100E21-400	30 (133)	1.4 (36)	37 (17)	6 000
		2050E09	60 (267)			
Modal analysis, medium to large structure	2100E11	2100E21-400	35 (156)	1.0 (25)	33 (15)	5 400
		2100E18	100 (440)			
Dual purpose design, modal and general vibrate	2075E	2100E21-400	40 (178)	1.0 (25)	35 (16)	6 500
		2050E09	75 (334)			
Dual purpose design, modal and general vibrate	2110E	2050E09-FS	110 (489)	1.0 (25)	54 (25)	6 500
Accelerometer calibration, low to high frequency, payloads < 500 grams	K394B31	2100E21-C	15 (67)	0.4 (10)	22 (10)	50 000

* Includes trunnion base (except for Model K394B31)


** Load dependent

In the interest of constant product improvement, specifications are subject to change without notice.

ELECTRODYNAMIC EXCITER FAMILY

with Power Amplifier Drive Capacity

Kit model numbers indicated

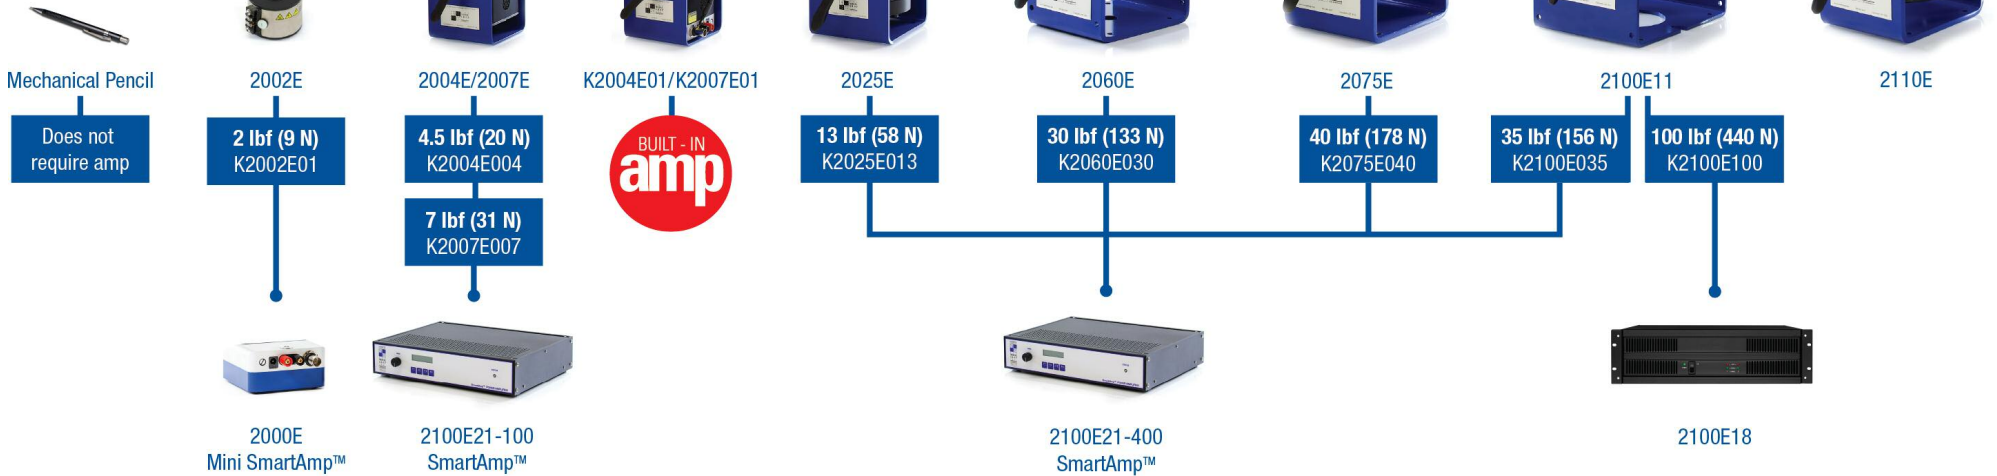

The Modal Shop 3149 E Kemper Rd Cincinnati OH 45241 USA
 Phone 513-351-9919 / Toll Free 800-860-4867 / Fax 513-458-2172

Note: Shakers in scale (amplifiers and cooling system not in scale)